

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



10 Rec'd PCT/PTO 07 JAN 2005



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/005169 A1

(51) International Patent Classification⁷: B65G 47/66

(21) International Application Number:
PCT/NL2003/000504

(22) International Filing Date: 9 July 2003 (09.07.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1021038 9 July 2002 (09.07.2002) NL

(71) Applicant (for all designated States except US): MCC
NEDERLAND B.V. [NL/NL]; Einsteinstraat 1, NL-2691
GV 's-Gravenzande (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DE GEUS, Sjoerd
[NL/NL]; Nieriistraat 97, NL-2622 GB Delft (NL). VER-
DUIJN, Gijsbertus, Johannes [NL/NL]; Zeggelaan 77,
NL-4844 SC Terheijden (NL).

(74) Agent: PRINS, A.W.; Nieuwe Parklaan 97, NL-2587 BN
Den Haag (NL).

(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONVEYING SYSTEM WITH A SLIDE-OVER DEVICE BETWEEN TWO BELT CONVEYORS, SLIDE-OVER DEVICE AND INTERMEDIATE ELEMENT WITH A LIDE-OVER SURFACE

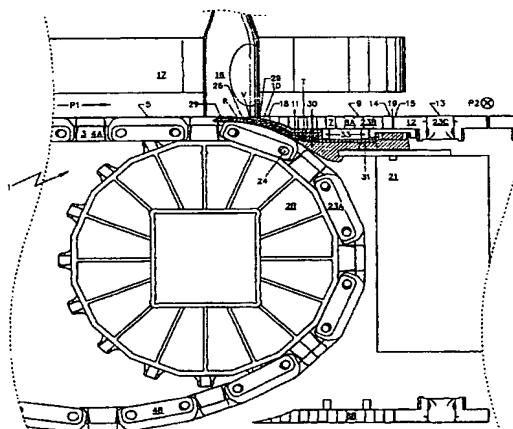

WO 2004/005169 A1

(57) Abstract: A conveying system (1), comprising an endless first conveyor belt (3) circulating between at least first and second (2B) divert elements, a top run (4A) of the first conveyor belt (3) forming a first conveying surface (5) movable between the divert elements in a first conveying direction (P1), and an endless second conveyor belt (7) circulating between at least third and fourth divert elements, the top run (8A) of the second conveyor belt (7) forming a movable second conveying surface (9) movable between the divert elements in a second conveying direction (P2), the second conveyor belt (7) extending at least partly above and along the second divert element (2B), so that the first (3) and second (7) conveyor belts, while including a gap-shaped interspace (10), are in mutually transverse alignment. In the interspace (10), intermediate elements (T), in particular fingers, are arranged that bridge the gap between the first (5) and second (9) conveying surface.